Pioneer

DJ CONTROLLER

DDJ-WEGO

DDJ-WeGO

Firmware Update Guide

1. Read Before Use (Important)

Cautions

- Be sure to follow the procedure in this guide to update the firmware.
- DO NOT turn off the power or disconnect the USB cable unit updating is completed.
- If you should have any questions, please contact the Pioneer Customer Support Center.

Reference information
This updater has been verified to operate on the operating systems below;

- Windows : Windows® XP / Windows Vista® / Windows® 7
- Mac OS X : 10.6 / 10.7

Approximately 2 minute is required for updating.

2. What you need for updating

- Update file for DDJ-WeGO
  * When the downloaded zip file is double-clicked, the update file is unzipped.

  Example) DDJ-WeGO_V104.jar



- A computer where Java has been installed.
  * If Java has not been installed, please download the Java Runtime Environment (JRE) at: http://java.com and install it on your computer.

3. Updating procedures

1) Connect the above prepared computer to DDJ-WeGO via the USB cable included with the product.

2) Turn on the power of DDJ-WeGO while pressing the two [HEARDPHONE CUE] buttons (Left figure) and ensure the Level meter LEDs (Right figure) flash before releasing your finger from the [HEARDPHONE CUE] buttons.

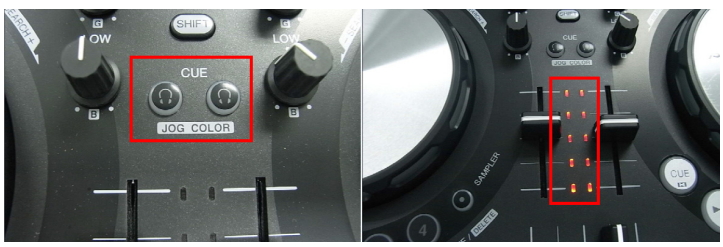

3) When the update file for DDJ-WeGO (DDJ-WeGO_Vxxx.jar) is activated, the following dialogue is displayed. Click the [Start] button.

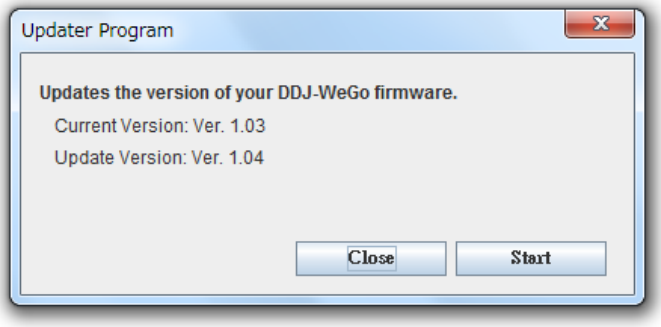

4) The update of the firmware starts.

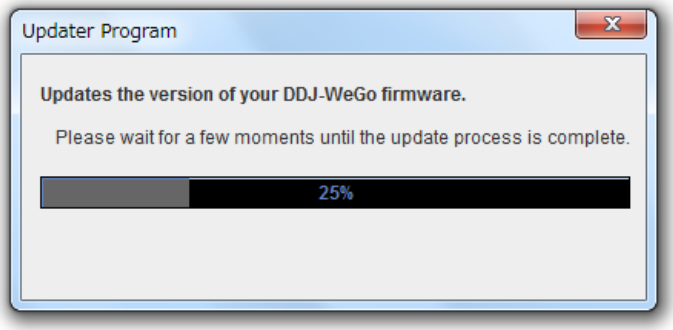
Updater Program
Updates the version of your DDJ-WeGo firmware.
Please wait for a few moments until the update process is complete.
25%

5) When the firmware update process is complete, click the [OK] button.

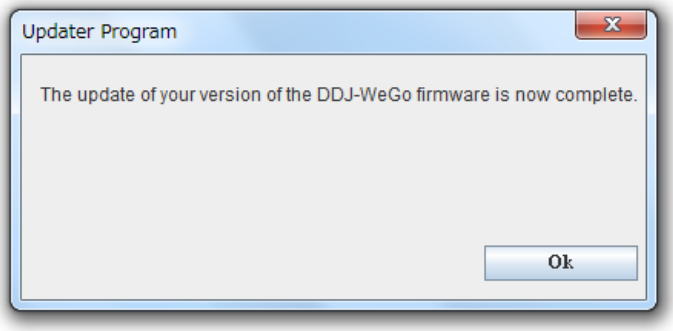

Please note that if you fail to update, turn on the power of DDJ-WeGO again and start from Step 4) of the above Updating Procedures.

3. How to check the firmware version

[For Windows]
ASIO driver exclusively for DDJ-WeGO is required to be installed.

From the [Start menu],
Run [All the programs] → [Pioneer] → [DDJ-WeGO] → [DDJ_WeGO Version Display Utility]

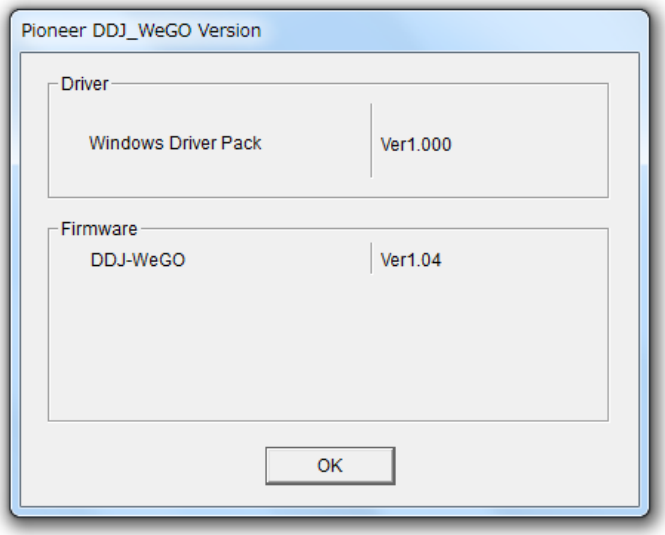

[For Mac]
Open the Apple menu while pressing the option key, then select "System Profiler."

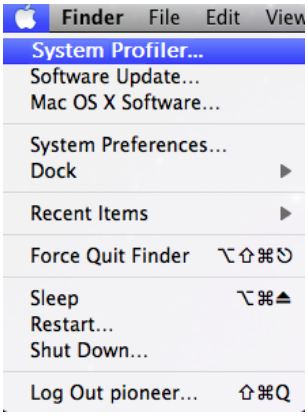

Select the [USB] from the [Hardware] to display the name of the controller. Select the controller to display the firmware version.

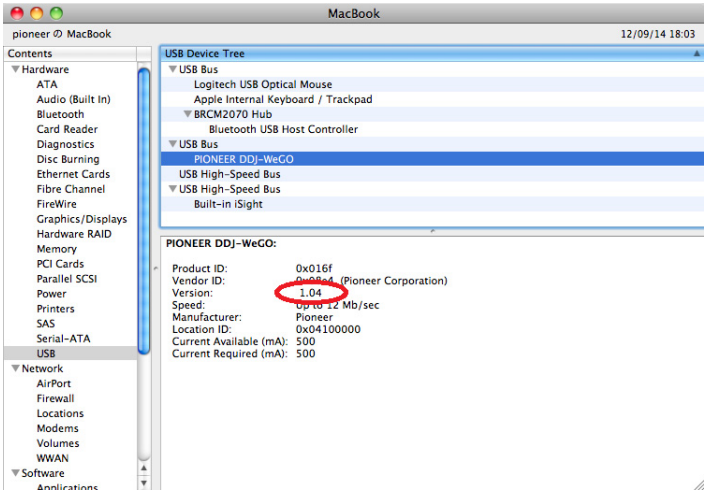

About trademarks and registered trademarks

- Pioneer is a registered trademark of PIONEER CORPORATION.
- JAVA is a trademarks of Sun Microsystems, Inc. registered in the United States and other countries.
- Microsoft®, Windows Vista®, Windows® and Internet Explorer® are either registered trademarks or trademark of Microsoft Corporation in the United States and/or other countries.
- Apple, Macintosh, Mac OS and iTunes are trademarks of Apple Inc. registered in the United States and other countries.

© 2012 PIONEER CORPORATION.
All rights reserved.
PIONEER CORPORATION